

Technical Data Sheet



CODE 12612

VORTICE 150/6" AR

Wall/window axial fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Voltage (V)	220-240
Inlet	Automatico	Weight (Kg)	2,07
Insulation class	II°	Max airflow - extract (l/s)	65,3
IP	X4	Max airflow - extract (m3/h)	235
Max absorbed current (A)	0,11	Max airflow - intake (l/s)	41,7
Max absorbed power (W)	25	Max airflow - intake (m3/h)	150
Max absorbed Power at 60 Hz (W)	25	Max airflow (m³/h)	235
Max ambient temperature for continuous operation (°C)	50	RPM	1340
Max room temperature for continuous operation at 60 Hz (°C)	50	Rpm - exhaust	1340
Ø Discharge hole (mm)	150	Rpm - supply	2040
		Sound pressure Lp [dB (A)] at 3 m	37,5

DIMENSIONS

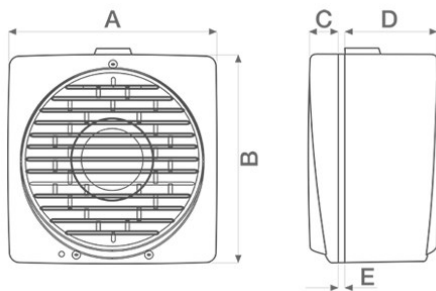

Ø hole through the glass	185/190
Ø hole through the wall	185/190
Size A (mm)	215
Size B (mm)	218
Size C (mm)	31
Size D (mm)	97,5
Size E (mm)	2/38

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 12612

VORTICE 150/6" AR

Wall/window axial fans




DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

□

ACCESSORIES



KIT TE 150/6" (TORRETTA)

Code 13001



KIT MU (MURO)

Code 13018



KIT WV 150/6" (DOPPI VETRI)

Code 13021



KIT FF 150/6" (DOPPIA FINESTRA)

Code 13024



CR5N

Code 12941



CREN

Code 12944



C PIR

Code 12998



C TIMER

Code 12999



C TEMP

Code 12992



C SMOKE

Code 12993



C HCS

Code 12994

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com



KIT TC 150/6"
(TETTO CON
CONDOTTO)

Code 13027