

# Technical Data Sheet

CODE 12020

## MEDIO I

Centrifugal duct fans for flush mounting



### Certifications



IMQ



IMQ Performance



CCC




EAC

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Airflow at 1st speed (m <sup>3</sup> /h)	70
Insulation class	II°	Max airflow at Max speed (l/s)	34
IP	X4	Max airflow at Max speed (m <sup>3</sup> /h)	122
Max absorbed current at Max speed (A)	0,18	Max pressure at Max speed (mmH2O)	34
Max absorbed current at Min speed (A)	0,14	Max pressure at Max speed (Pa)	331
Max absorbed power at Max speed (W)	29	Max RPM	1890
Max ambient temperature for continuous operation (°C)	50	Min RPM	1150
Nominal diameter (mm)	100	Pressure at 1st speed (mmH2O)	21
∅ Discharge hole (mm)	97	Pressure at 1st speed (Pa)	206
Power absorbed at 1st speed (W)	25	Sound pressure at 3 m - min speed Lp [dB (A)] 3m - min speed	35,9
Voltage (V)	220-240	Sound pressure at 3m at Max speed Lp [dB (A)]	41,2
Weight (Kg)	2,8	Sound pressure level at 3 m at Max speed on extraction side [dB(A)]	39,6
Airflow at 1st speed (l/s)	19	Sound pressure level at 3 m at Min speed on extraction side [dB(A)]	33,4

### DIMENSIONS

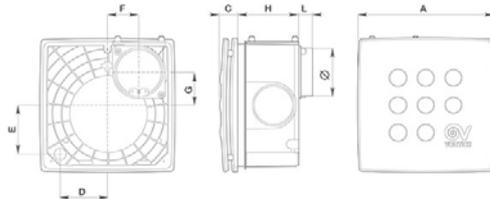

Size A (mm)	287
Size C (mm)	37
Size D (mm)	97
Size E (mm)	103
Size F (mm)	72
Size G (mm)	69
Size H (mm)	130
Size L (mm)	26

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

#### UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

#### OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

# Technical Data Sheet

CODE 12020

## MEDIO I


Centrifugal duct fans for flush mounting




### DESCRIPTION

- Material used for parts not recessed into wall: white ABS plastic.
- Material used for parts recessed into wall: talc-filled black plastic (PP) giving added strength.
- Nominal diameter 100 mm.
- Capacitor start 2-speed induction motor coupled to a forward bladed centrifugal impeller, with thermal overload cutout and self-lubricating bushings.

### CURVES

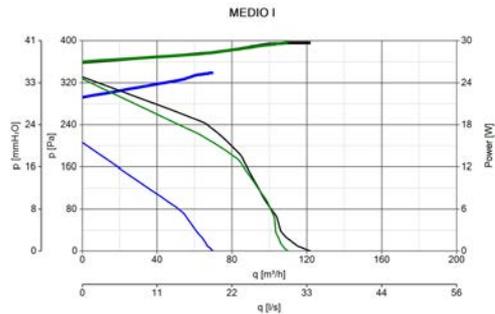

### ACCESSORIES



#### DEVIATORE DI FLUSSO M 10/4

Code 22310

#### KIT SOFFITTO MEDIO

Code 22492

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:  
[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)  
After Sales:  
[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

#### UNITED KINGDOM & REP. OF IRELAND

Sales Dept:  
[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)  
Technical Dept:  
[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)

#### OTHER COUNTRIES

Sales Dept:  
[export@vortice-italy.com](mailto:export@vortice-italy.com)  
After Sales:  
[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)