

Technical Data Sheet

CODE 11965

ARIETT LL

Centrifugal duct fans



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Ø Discharge hole (mm)	97
Insulation class	II°	Voltage (V)	230
IP	X4	Weight (Kg)	1,47
Max absorbed current (A)	0,14	Max airflow (l/s)	19,4
Max absorbed power (W)	18	Max airflow (m ³ /h)	70
Max absorbed power at Max speed (W)	18	Max pressure (mmH2O)	12
Max ambient temperature for continuous operation (°C)	40	Max pressure (Pa)	118
Nominal diameter (mm)	100	RPM	2315
		Sound pressure Lp [dB (A)] at 3 m	40

DIMENSIONS

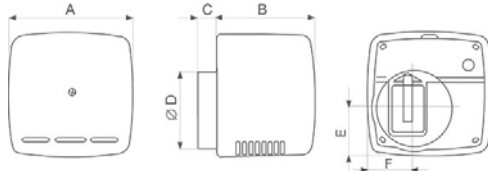

Size A (mm)	156
Size B (mm)	123
Size C (mm)	25
Size D (mm)	Ø 97
Size E (mm)	60
Size F (mm)	60

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 11965

ARIETT LL


Centrifugal duct fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter: 100 mm
- Motor with thermal overload protection and shaft turning in ball bearings.
- Maximum air flow 70 m³/h
- Non-return damper fitted to outlet port.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controller.

CURVES

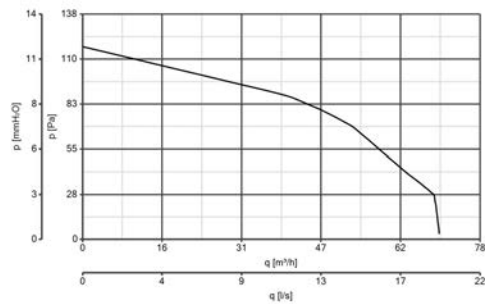

ACCESSORIES



C 1.5 (COMANDO EL. 1.5 A)

Code 12966



SCNRB SCAT.COM.NON REV.INCASSO

Code 12971



KIT SCB (TRASF.E.C.)

Code 22481



DEVIATORE DI FLUSSO M 10/4

Code 22310

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com