



VF-LF


VF-LF Series Rectangular Industrial Exhaust Fan

- Suitable to transmit the air with the temperature below 60°C in the environment where has not flammable, explosive and caustic air, the dust containing index is below 150mg/m3.

Specifications:

Model	Rated Voltage (V)	Frequency (Hz)	Output Power (Kw)	Speed (RPM)	Air flow (m³/h)	SOUND PRESSURE LEVEL [DB(A)]	APPLICABLE AREA
VF-LF800	380	50	0.37	500	20000	65	80-100m²

*Sound pressure at 3 mt

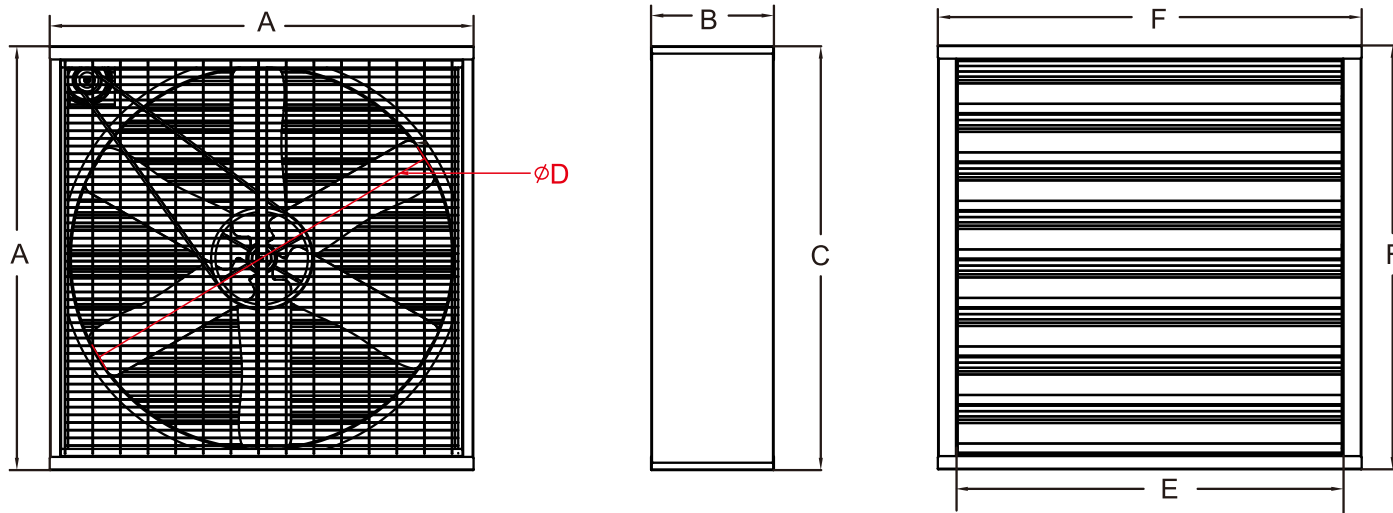

Dimension(mm):

Model	A	B	C	D	E	F
VF-LF800	800	400	800	600	660	800

VF-LF

VF-LF Series Rectangular Industrial Exhaust Fan


- Suitable to transmit the air with the temperature below 60°C in the environment where has not flammable, explosive and caustic air, the dust containing index is below 150mg/m3.



Specifications:

Model	Rated Voltage (V)	Frequency (Hz)	Output Power (Kw)	Speed (RPM)	Air flow (m³/h)	SOUND PRESSURE LEVEL [DB(A)]	APPLICABLE AREA
VF-LF900	380	50	0.37	520	28000	60	100-130m²

*Sound pressure at 3 mt

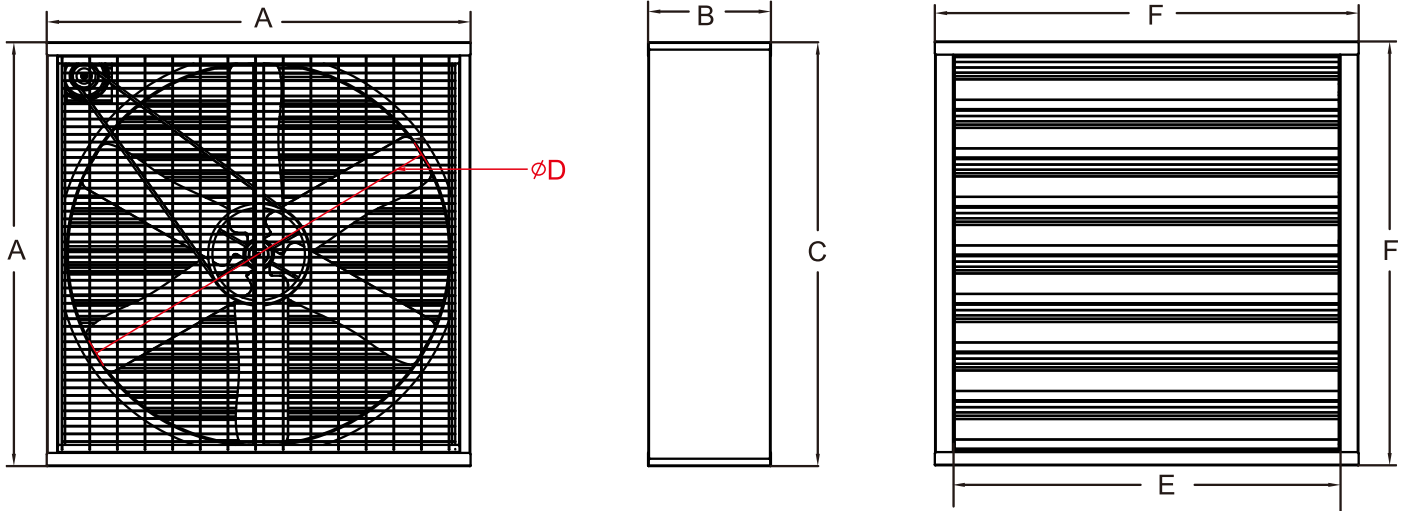

Dimension(mm):

Model	A	B	C	D	E	F
VF-LF900	900	400	900	750	770	900

VF-LF

VF-LF Series Rectangular Industrial Exhaust Fan


- Suitable to transmit the air with the temperature below 60°C in the environment where has not flammable, explosive and caustic air, the dust containing index is below 150mg/m3.



Specifications:

Model	Rated Voltage (V)	Frequency (Hz)	Output Power (Kw)	Speed (RPM)	Air flow (m³/h)	SOUND PRESSURE LEVEL [DB(A)]	APPLICABLE AREA
VF-LF1380	380	50	1.1	450	44500	72	160-200m²

*Sound pressure at 3 mt

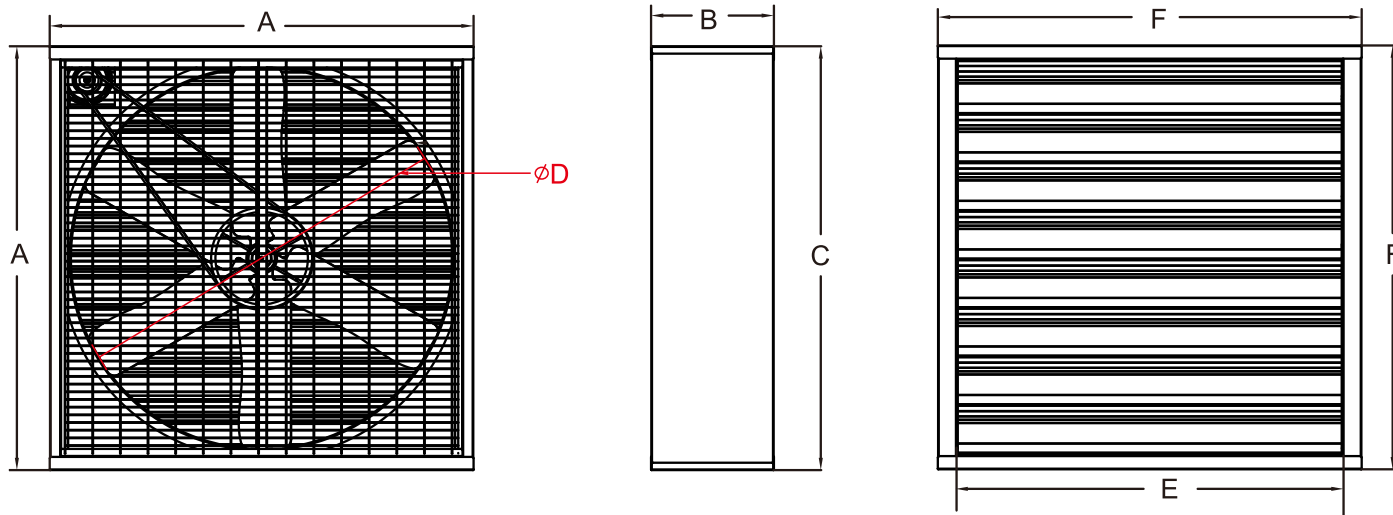

Dimension(mm):

Model	A	B	C	D	E	F
VF-LF1380	1380	400	1380	1115	1251	1380